


CONNECTING CA 350 HRV / ERV TO  
A 520 MANIFOLD  
HORIZONTALLY MOUNTED LEFT VERSION SHOWN

FRONT VIEW

- REQUIRED PARTS**
- ALUMINUM SEAM SEALING TAPE (OR MASTIC)

**NOTE:**  
SUPPLY DISTRIBUTION IS SHOWN  
RETURN IS BEHIND SUPPLY AND  
IDENTICAL

▲ ALL SEAMS TO BE SEALED  
WITH ALUMINUM SEAM SEALING  
TAPE (OR MASTIC)

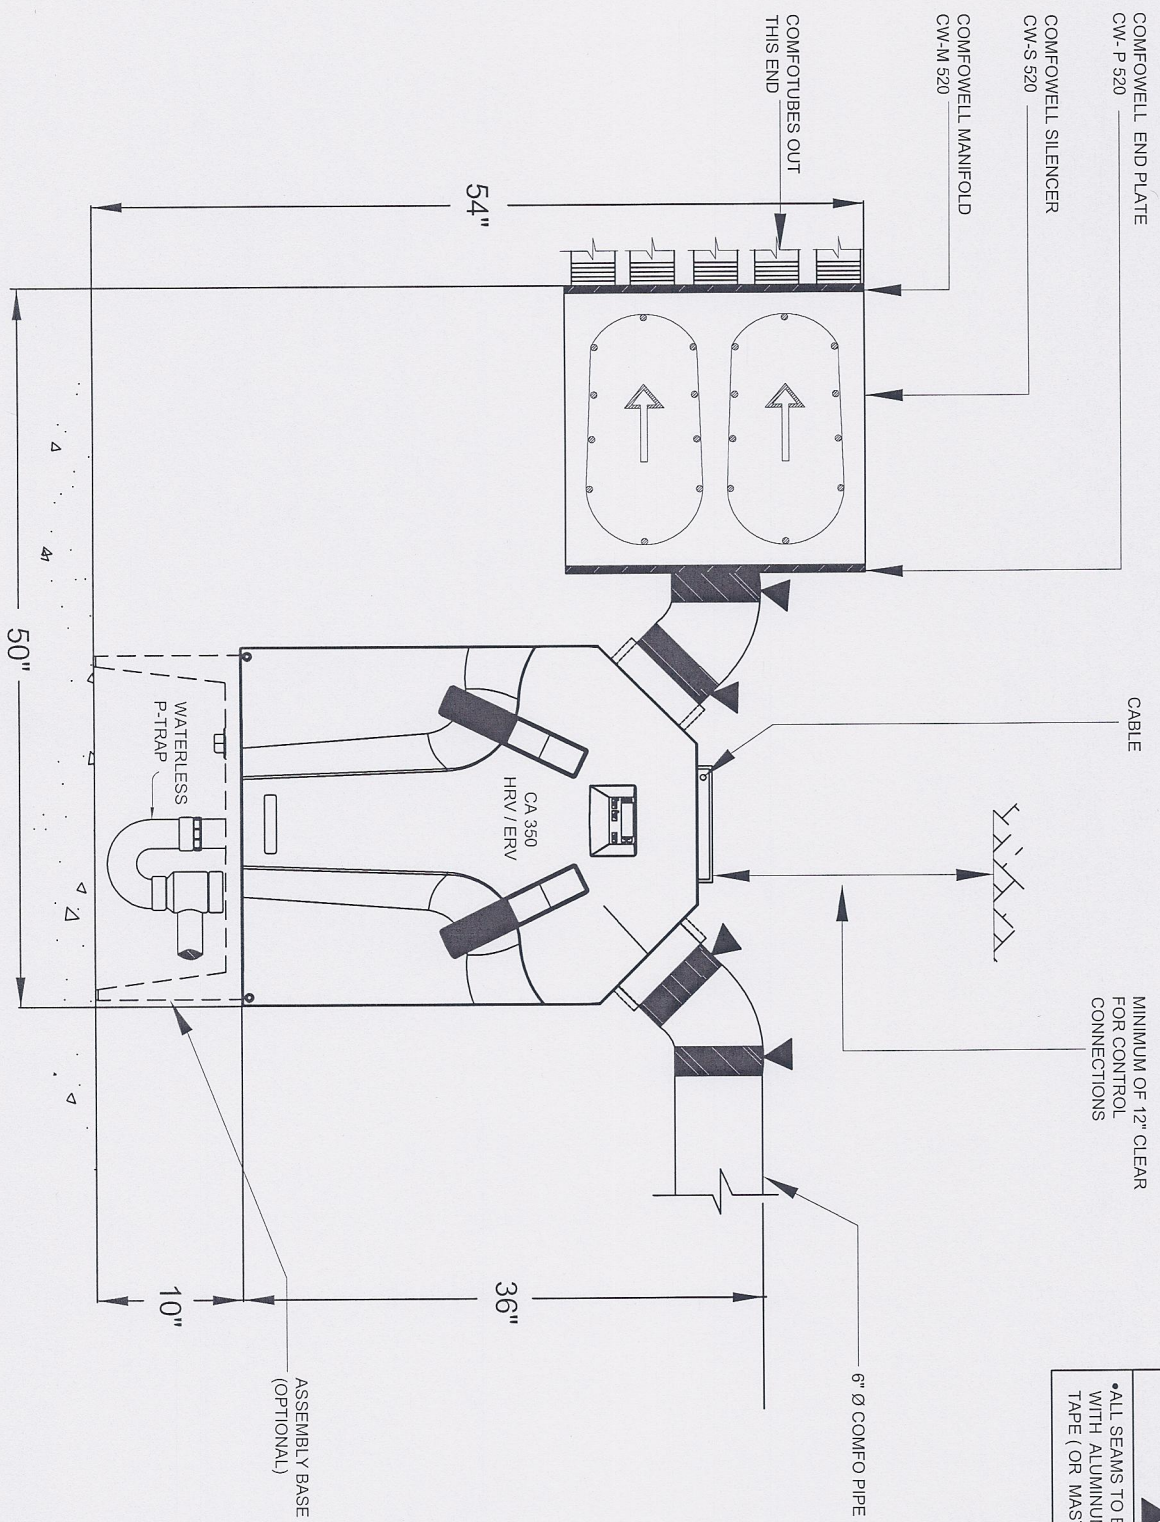



CA 350 HRV / ERV WITH A CW 520  
MOUNTED IN DOWN WARD CONFIGURATION

HORIZONTALLY MOUNTED LEFT VERSION SHOWN


FRONT VIEW

**REQUIRED PARTS**

- ALUMINUM SEAM SEALING TAPE (OR MASTIC)

**NOTE**  
SUPPLY DISTRIBUTION IS SHOWN  
RETURN IS BEHIND SUPPLY AND  
IDENTICAL

▲  
• ALL SEAMS TO BE SEALED  
WITH ALUMINUM SEAM SEALING  
TAPE (OR MASTIC)

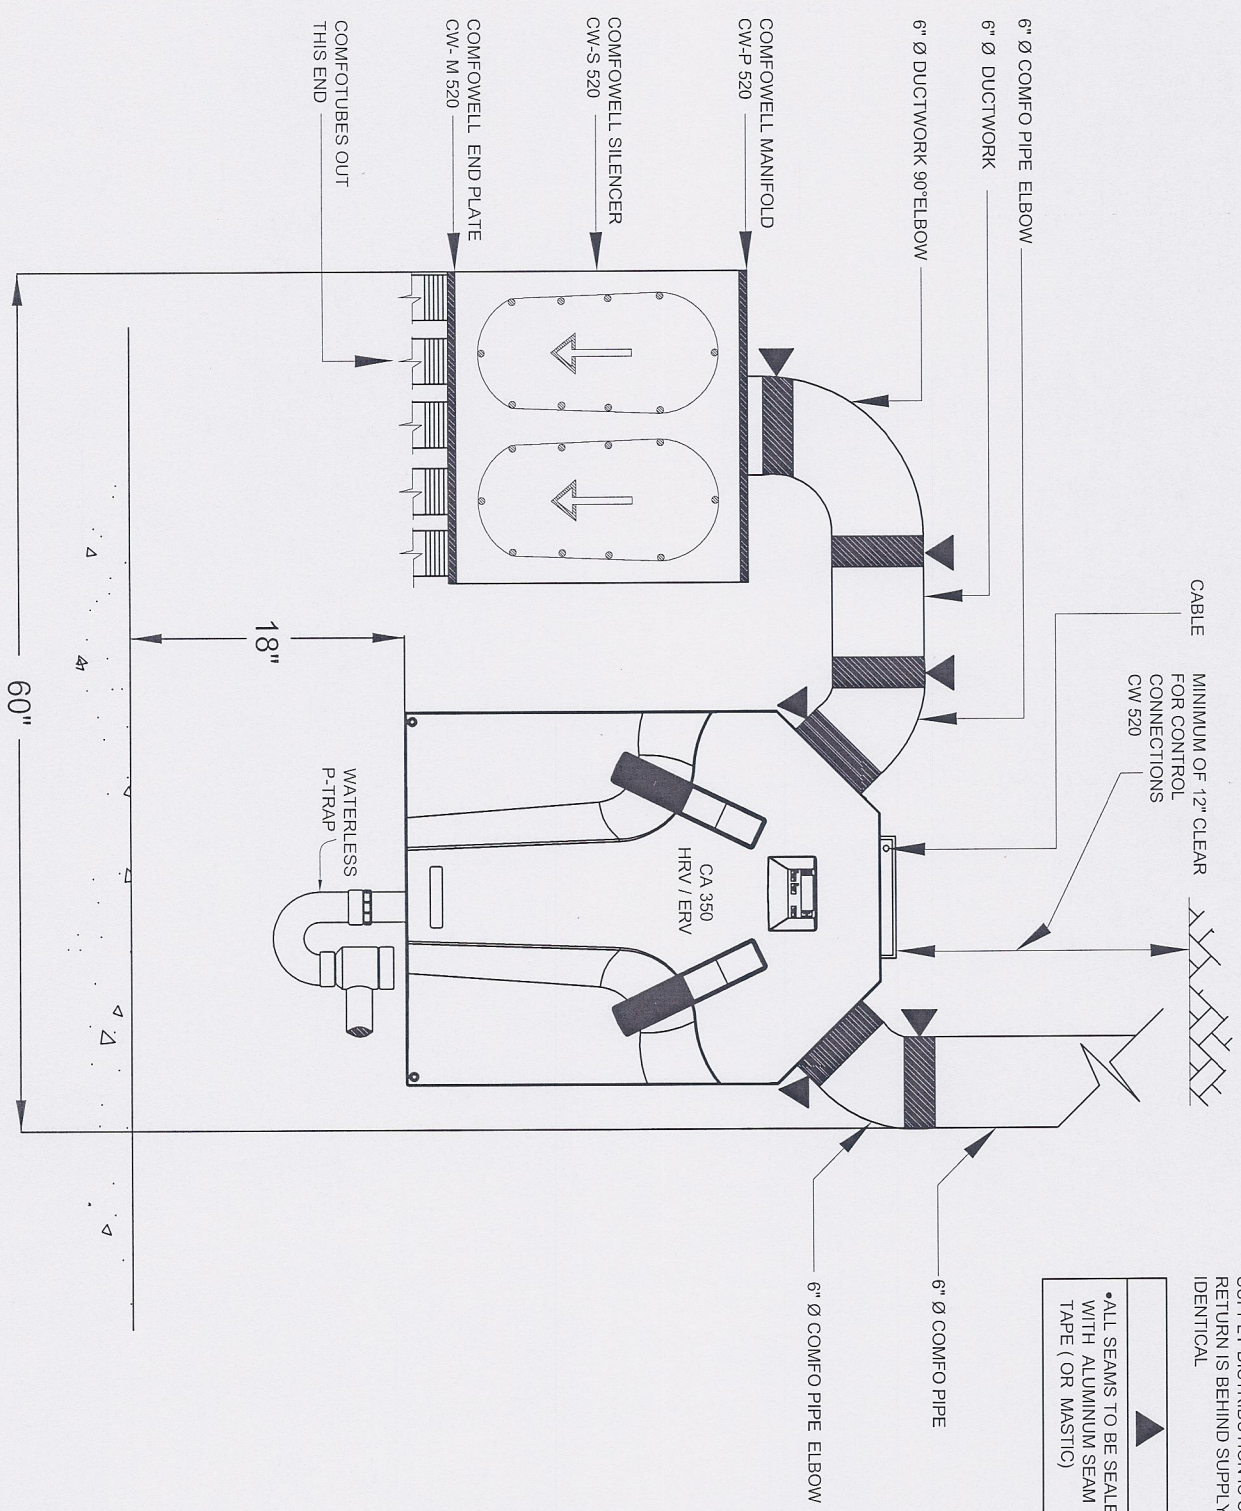

60"

18"

WATERLESS  
P-TRAP

CA 350  
HRV / ERV

CABLE  
MINIMUM OF 12" CLEAR  
FOR CONTROL  
CONNECTIONS  
CW 520

6" Ø COMFO PIPE ELBOW

6" Ø DUCTWORK

6" Ø DUCTWORK 90° ELBOW

COMFOWELL MANIFOLD  
CW-P 520

COMFOWELL SILENCER  
CW-S 520

COMFOWELL END PLATE  
CW-M 520

COMFOTUBES OUT  
THIS END

6" Ø COMFO PIPE

6" Ø COMFO PIPE ELBOW